

# AP 275

Perkins  
Mecc Alte  
D+ &



ISO8528

GC, ) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$\$#( #

z) \$ z' z' D:

	"	kw	"	kw	Amp
400/230	275,00	220,00	250,00	200,00	360,80

fPQDE

GC, ) &

,) & z

fDF DE

%\$!

% %&

GC" \$(\*\*

z&(

GC

## Standard Specifications

### ALTERNATOR

### TRANSFER SWITCH

# AP 275

Perkins  
Mecc Alte  
D+' &''

Manufacturer	Perkins		
Model	1506A-E88TAG3		
		258,00 kw [346,00HP]	
	L	8,800	
	"	112x149	
		16,1:1	
fl # 7	"# "	1500	
fl 7	L	41,00	
	L	29,60	
AbsorbedAirDischargeReSourceKey.Text	' # "	15,00	
fl ' # 7	' # "	370,00	
	' # "	40,40	
	° C	558,00	
		24 V d.c.	
	Load	%\$i	+) i
	# "	55,50	41,60
			28,90


		Mecc Alte
		ECO38-1LN/4
	Hz	50
	"	250,00
7cg'		0,80
		3
fl 7		400/230
	A	360,80

		fl 7		fl 7	
	"	"	"	"	L
AP 275		2750,00	1300,00	1702,00	
		fl 7		fl 7	
	"	"	"	"	L
MS 60	2860	3960	1356	2097	470

# AP 275

Perkins  
Mecc Alte  
D+' &'

## 1 D+' &'

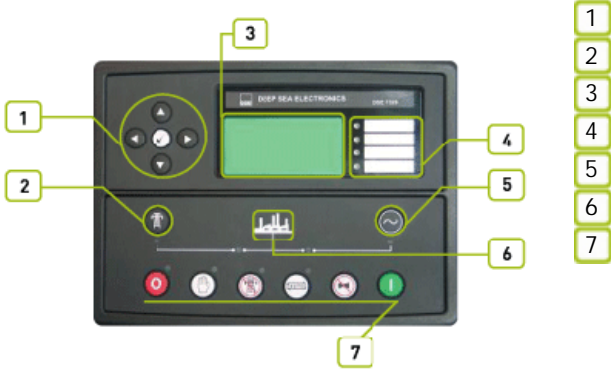

## 2

8G9ž +' &\$ž ) 5ž&&\$#(\$

## 3

## 4


## 5

8G9+' &\$ž &&\$' ž ž "8G9+' &\$' '8G9+' &\$' % &1 \*(' žFG&' &žFG(,) ž



# AP 275

Perkins  
Mecc Alte  
D+ & "

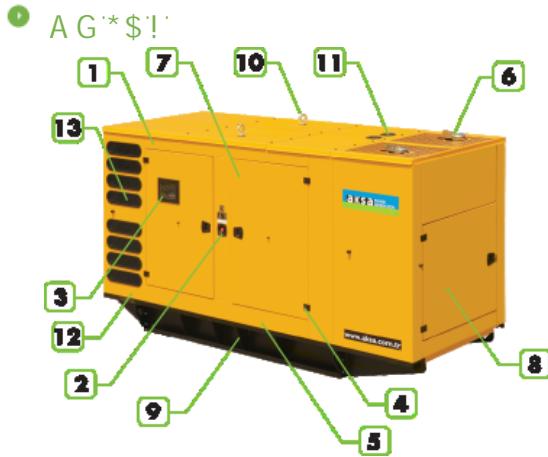

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1356
fl "L	"	3960
fl "L	"	2097
	L	470