

AP 330

Perkins
Mecc Alte
D+ &



ISO8528

SZUTEST

CE

2000/14/EC

z) \$ z' z' D:

	kw	Amp
400/230	330,00	433,00
	264,00	
	300,00	
	240,00	

Standard Specifications

ALTERNATOR

TRANSFER SWITCH

AP 330

Perkins
Mecc Alte
D+' &''


Manufacturer	Perkins		
Model	1506A-E88TAG5		
		% \$ \$' "# "	
		307,00 kw [411,70HP]	
	L	8,800	
	"	112x149	
		16,1:1	
	fl # ı	"# "	1500
	fl "ı	L	41,00
		L	33,20
AbsorbedAirDischargeReSourceKey.Text	' # "	17,00	
	' # "	370,00	
	' # "	50,00	
	° C	574,00	
		24 V d.c.	
	Load	% \$ \$ı	'+)ı
	# ") \$ı	
		64,90	48,20 33,00

		Mecc Alte
		ECO38-2LN/4
	Hz	50
	"	300,00
7 cg'		0,80
		3
	fl ı	400/230
	A	433,00

		fl "ı		fl "ı	
	"	"	"	"	L
AP 330		2750,00	1300,00	1734,00	
		fl "ı		fl "ı	
	"	"	"	"	L
MS 60	3030	3960	1356	2097	470

AP 330

Perkins
Mecc Alte
D+' &'

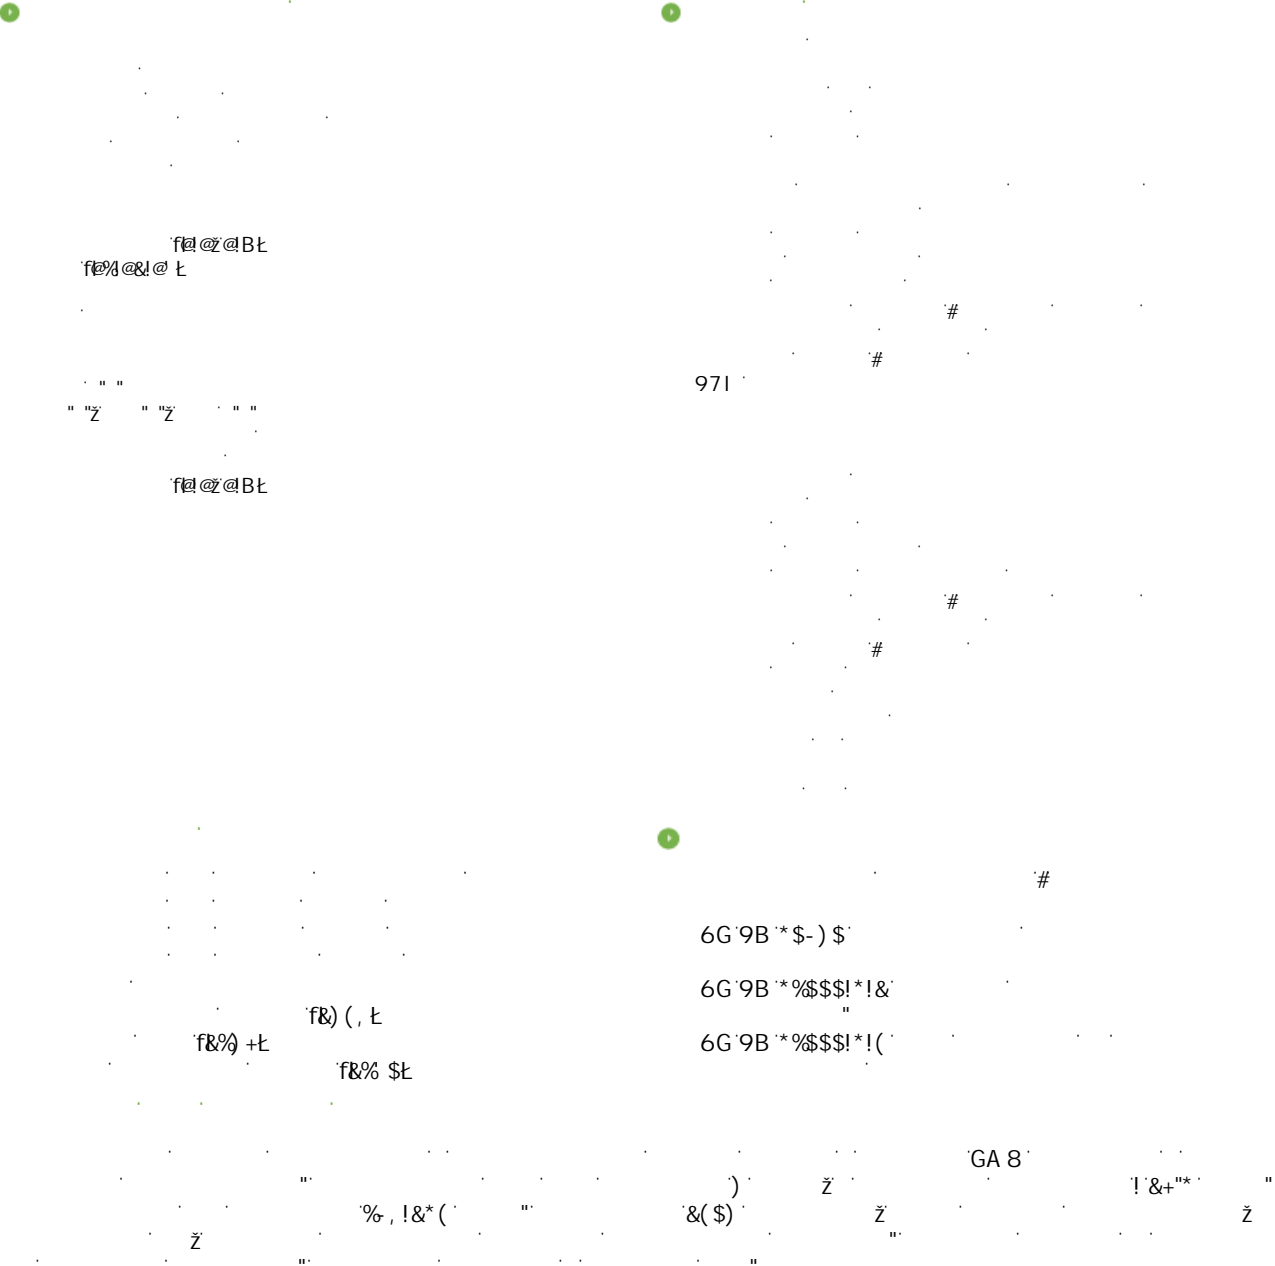

AP 330

Perkins
Mecc Alte
D+' &''



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1356
fl "L	"	3960
fl "L	"	2097
	L	470